



Mobile Power Solutions

OVER THE AIR UPDATE GUIDE – STEPS

Learn how to set up over the air updates on your Battery Manager.

TABLE OF CONTENTS


Starting The Update	2
Connecting to Your Wifi Network	3-5
Running The Updated	6
Screen Settings and Updating Firmware	7-8
Extra Points	8

STARTING THE UPDATE

Before issuing an update, verify that you have:

- A. A 2.4GHz Wi-Fi network (A 2.4GHz Hotspot from your phone will also work.)
- B. Your Display's power source is not low (to avoid any power disconnects during the update process).


2. **Please ensure the display is on the Main Screen and your device is connected by the blue “-” indicator**

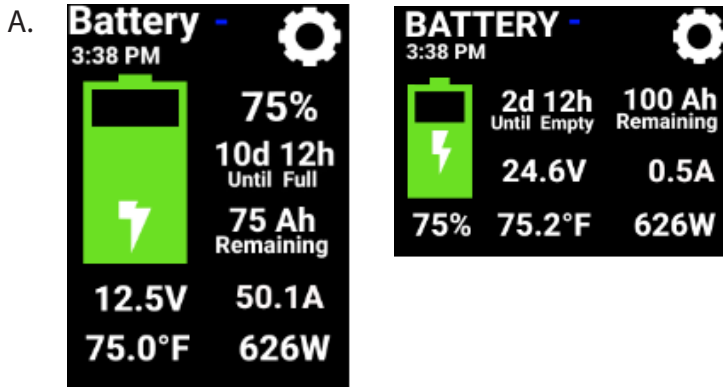

3.


Open the Go Power Connect! App and connect to your display,

- A. Open the Go Power Connect! App, select the plus icon on the top right.
- B. On the “Add device” screen select the display

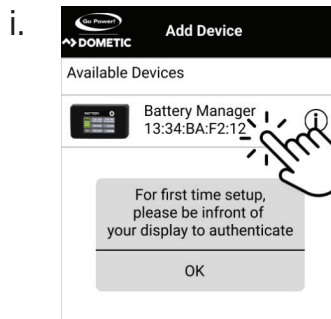


4.

Once connected, click the top Right settings cog and select the “GP-Display Update”

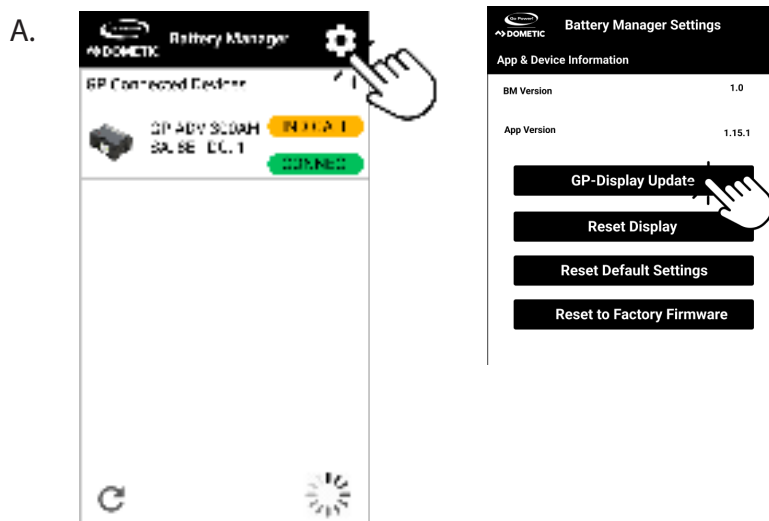

- Click "GP-Display Update" this will lead you into the update screen, followed with "Connect to Wifi"

A.

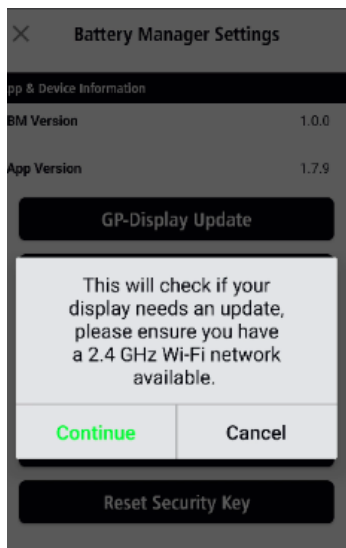

- Select the Wi-Fi network you wish to connect to, if you do not see your Wi-Fi network, re-scan by selecting the "refresh" icon on the bottom left.

A.



- B. Note: If using a hotspot, ensure your phone's name does not have any special characters. For Iphone users, remove the apostrophe. Additional characters should also be removed (.....)." <- Brackets should contain the symbols.

i.



- ii. This should be renamed to Rick iPhone or Rick




iii.



Note: Iphone users must toggle the "Maximize Compatibility" in order for the display to connect" to your hotspot.



C. Ensure the WiFi password is entered correctly

i.

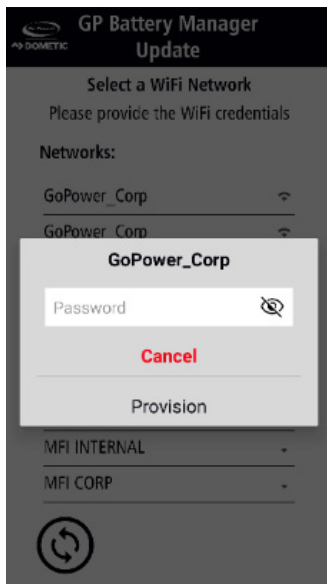



D. For Android users an additional pop may occur, select the Wi-Fi network you have indicated on the app on the pop up.

i.

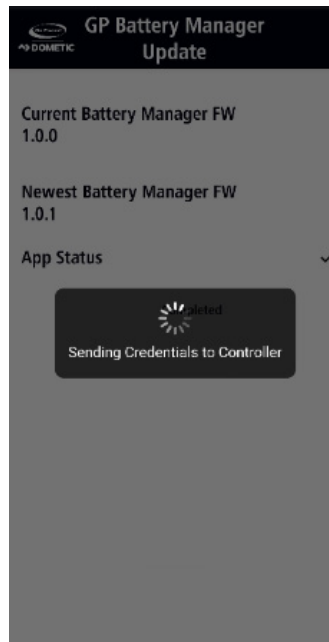
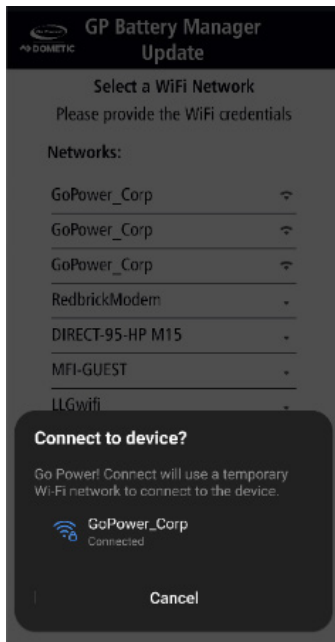


- E. Press the update button once loaded on the next screen. The update process will now begin. **Do not exit the app or turn off the phone.**


i.

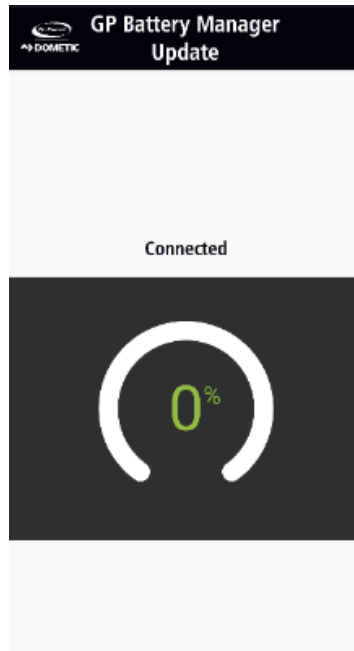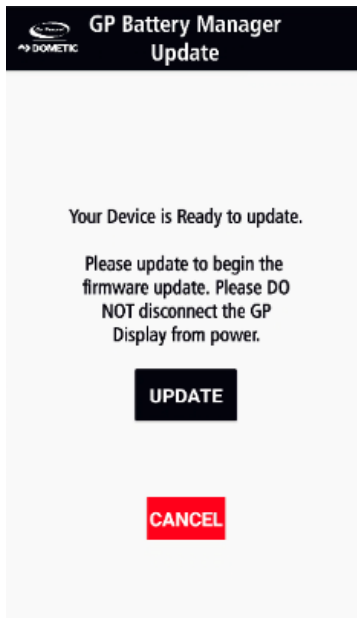


ii.

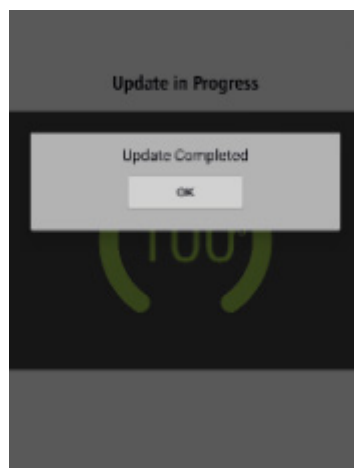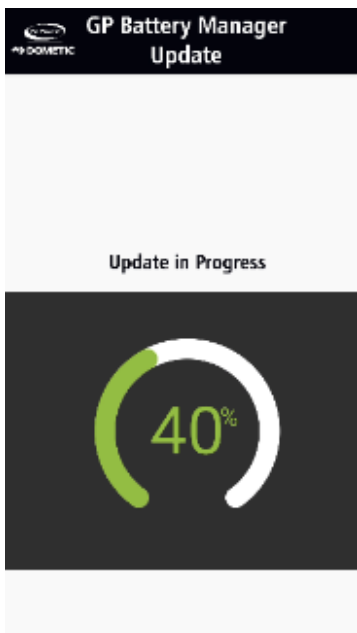


7. Your Display is now updated to the latest version! Return to the “Device selection” by pressing “OK”. The display will restart, double check that your Display has booted up successfully to the main screen before reconnecting.

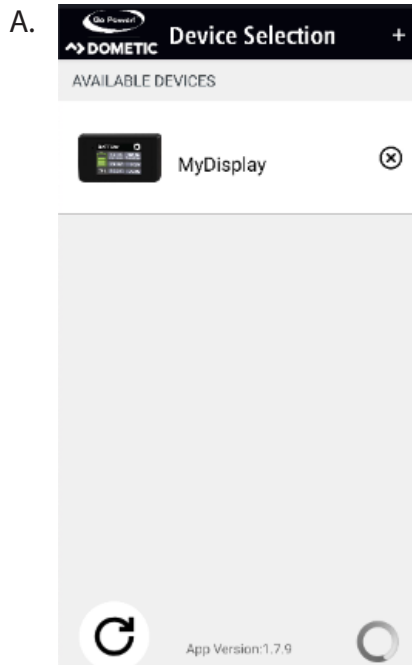


8. If you're unsatisfied with the latest update, you can revert to the original factory firmware.

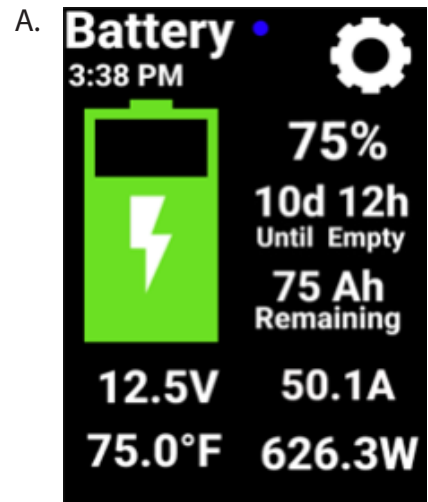

9. Go to “Screen Settings”

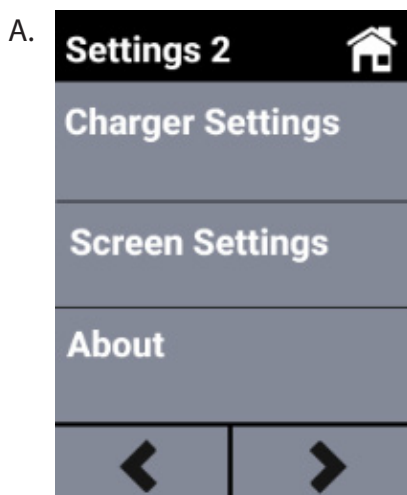


10. Go to “Reset Settings”

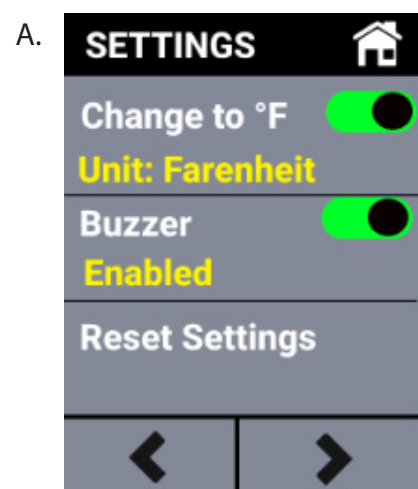

11. Go to "Reset Factory Firmware"

A.

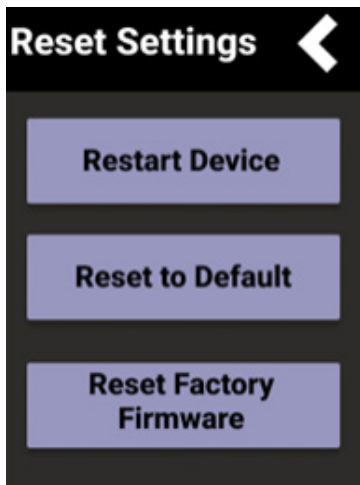

FEW EXTRA POINTS

1. Ensure Bluetooth and location is enabled prior to reconnecting to the display via the GoPower! connect app. You can turn off your WiFi or Hotspot after the OTA process.
2. After the display has been updated, press "Load" once all GoPower devices have been connected and shown on the "system setup" screen.

